



# ANLY TIMER

## H3B-RC WIDE VOLTAGE MULTI-RANGE ANALOG TIMER

Stocked and distributed by Ingram Products Inc.

Jacksonville, FL

[www.ingramproducts.com](http://www.ingramproducts.com)



### CHARACTERISTIC :


- Wide operating voltage range, from AC/DC 24V~240V
- 4 time ranges, selectable via DIP switch: 6S, 60S, 6M, 60M
- 2 modes selectable via slide switch: Mode A (2C) for DPDT time-limiting output contacts and Mode B (1A1C) for SPDT instantaneous and time-limiting output contacts
- UL, C-UL recognized and CE certified

### SPECIFICATION :


Operating voltage	AC/DC(V): 24~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 2VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 115g

## CONNECTION :

2C, Mode A




1A1C, Mode B




## TIMING CHART :

2C, Mode A




1A1C, Mode B




## DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 Socket or PF085A Socket

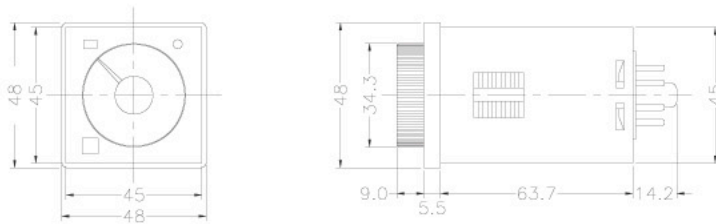

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket or P3G-08 Socket

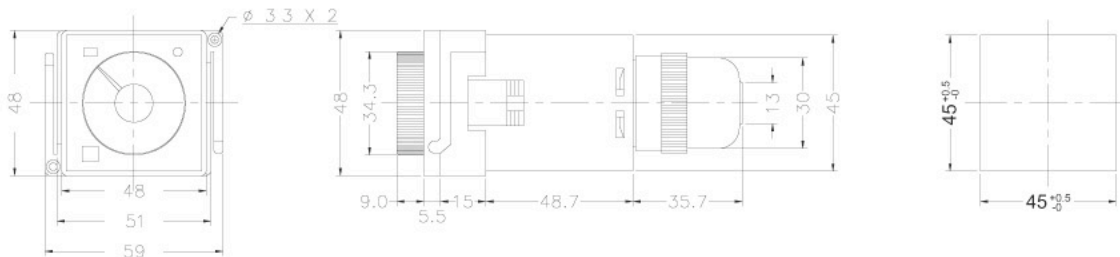

## ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

### TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242  
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

### MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

### HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
TEL: +852-2397-2505 FAX: +852-2397-6080

### CHINA SALES OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 5C, Zhaofeng Building, No.9, Alley 396, Changning Rd., Changning District, Shanghai, China 200042  
TEL: +86-21-6213-9371 FAX: +86-21-6212-3483