Alarm Light



Part No.: LX25

Features

stabilized



 UL Recognized. Can be used in UL NEMA Type 3, 3R, 4, 4X, 12

and 13 enclosures (E121431)

that is shatter resistant and UV

Low profile, top mounted gives

• Available in 5 colors: Red, Blue,

360 degree visibility

Hose down proof

Amber and Clear

Lens molded from GE Lexan

The Ingram LX25 is a UL 3, 3R, 4, 4X, 12, 13 low cost alarm light suitable for heavy duty applications inside and outdoors. The lens is molded from tough shatter resistant GE Lexan. This tamper resistant light is particularly useful in areas with high ambient noise levels where an audible signal may not be heard.

Ingram also offers daylight visible 120VAC sixty LED bulbs that fit the LX25 or any standard E26 screw-in socket.

Ingram p/n LEDBR120A Red LED Bulb: Amber LED Bulb: Ingram p/n LEDBA120A For best results, use red lens with red bulb, amber lens with amber bulb. or clear lens with either.

Technical Specifications

- Voltage:
- 12V, 24V, 120VAC
- Current Draw:
- 120VAC

12V

24V


0.21 Amps max. (Filament) 0.017 Amps max. (LED) 120VAC

Hole Pattern For Mounting

2.10 Amps max. (Filament)

1.1 Amps max. (Filament)

The LX25 comes with a 25 watt, 120V incandescent bulb. 25 watt incandescent bulbs at 12 and 24V are available for special order as well. They work equally well with AC or DC voltages.

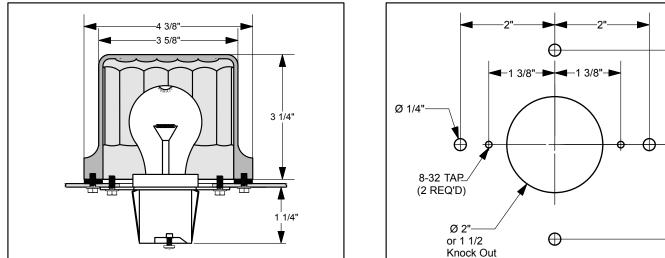

Cut-Away View

Rev. 4

