



ANLY TIMER

ET2-41 TWIN TIMER

Stocked and Distributed by Ingram Products Inc

Jacksonville, FL

www.ingramproducts.com



CHARACTERISTIC :

- Wide operating voltage range, AC/DC 24V~240V
- 10 time range, from 1 second to 300 hour
- X1, Y1, Y2 contact for mode control
- 22.5 mm thin body design


SPECIFICATION :

Operating voltage	AC/DC(V): 24~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 93g

TYPE SELECTION :

Type	ET2-41
Operation mode	B6
Output contact	2C / 1A1C
Time range	10 Ranges: 1s / 3s / 10s / 30s / 100s / 300s / 30m / 300m / 30h / 300h


CONNECTION :

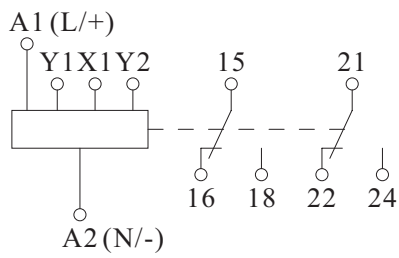

Contact	Short	Open
Y1 - A1	Repeat cycle OFF start	Repeat cycle ON start
Y2 - A1	2C	1A1C
X1 - A1	Gate	---

TIMING CHART :

Mode B6 : Circulation

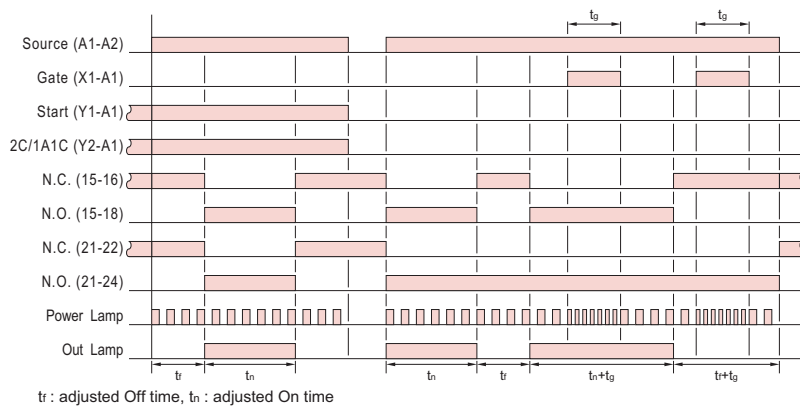

DIMENSIONS : (mm)

N type(Surface Mounting):

